


Stripwound flexible metal conduits galvanized steel square locked with EVC cord packing for ventilation ducting and suction vacuum cleaner

Type SOP single overlap packed - UNI EN ISO 15465:2005

CLASSIFICATION	UNI CEI EN 61386
Resistance to compression	4
Resistance to impact	4
Lower temperature - 40 °C	5
Upper temperature +100 °C	6
Bending	Flexible
Electrical characteristics	maintain electrical continuity and EMC shielding
IP protection according CEI EN 60529	IP54
Corrosion resistance	Medium
Tensile strength Ø 28 ÷ Ø 50 mm	4
Tensile strength > Ø 55 mm	5
Flame propagation	Non-flame propagating
Suspended load capacity	According to Ø (3 - 5)
RoHS – REACH compliance	Yes
Material type	DX 51D / Z100 Galvanized Steel - EVC
Made in European Union	Yes

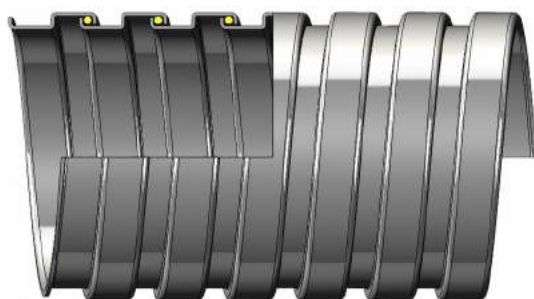

ZSP technical data sheet

OMMC ITALFLEX Srl
Via Pian di Rocco, 22
16042 CARASCO (GE) - ITALY
Ph. +39 0185 350231 | Fax +39 0185 351240



sales@ommcitalflex.com



CODE	Int. Ø mm	Est. Ø mm	Profile	Banding mm	Weight Kg/m
ZSP028A	28	32,6	SOP	110	0,42
ZSP030	30	35,0	SOP	103	0,50
ZSP040	40	45,0	SOP	135	0,65
ZSP040A	40	44,6	SOP	154	0,62
ZSP042A	42	46,6	SOP	161	0,64
ZSP045	45	50,0	SOP	154	0,97
ZSP050	50	55,0	SOP	171	1,07
ZSP055	55	60,0	SOP	187	1,17
ZSP060	60	65,0	SOP	203	1,27
ZSP070	70	75,0	SOP	194	1,30
ZSP075	75	80,0	SOP	208	1,39
ZSP080	80	85,0	SOP	221	1,48
ZSP085	85	90,0	SOP	234	1,57
ZSP090	90	95,0	SOP	248	1,66
ZSP095	95	100,0	SOP	261	1,75
ZSP100	100	105,0	SOP	382	2,44
ZSP110	110	115,0	SOP	419	2,68
ZSP120	120	125,0	SOP	456	2,92
ZSP125	125	130,0	SOP	475	3,03
ZSP130	130	135,0	SOP	493	3,15
ZSP140	140	145,0	SOP	530	3,39
ZSP150	150	155,0	SOP	568	3,63
ZSP160	160	165,0	SOP	691	4,57
ZSP180	180	185,0	SOP	776	5,13
ZSP200	200	205,0	SOP	861	5,69
ZSP250	250	255,0	SOP	1073	7,09
ZSP275	275	280,0	SOP	1179	7,80
ZSP300	300	305,0	SOP	1300	10,14

Packaging: [1] carton box [2] reel at specific measure [3] cutted at custom length [4] cutted with assembled fittings